


ACA0600

Specifications



Frame	20 mm x 20 mm x 1.6 mm tube, Butt Welded
Mesh	25 mm x 25 mm x 3 mm Welded Mesh - Welded to Frame
Cage Depth	550 mm deep OD - 530 mm deep ID
Cage Width	1100 mm wide OD - 1060 mm wide ID
Cage Height	600 mm high OD, 580 mm ID
Fixing Tabs	Fixing tabs are 60 x 30 mm Welded Tabs, 4 for Wall Fixing, 2 for Ground Fixing
Cage Safety	2 Front Corners are 90 mm radius for fall safety
Assembly Required	Units are made up of the following parts (see diagram) #1 - Access Door with Padlock Locking Tab #2 - Side with an Access Door for Right Side of Cage #3 - Front #4 - Side with no Access Door #5 - Top
Lockable	Access Door has a Welded Tab for a Padlock on right side of Cage
Assembly Fixings	All Fixings are tamper proof Torx number 30 which are supplied
Optional Base Panel	Optional Base Panel is available for Wall Mounted Units
Optional Back Panel	Optional Back Panel is available for Roof Mounted Units
Coating	All Units are Zinc Plated for Protection and then Black Powder coated for aesthetics

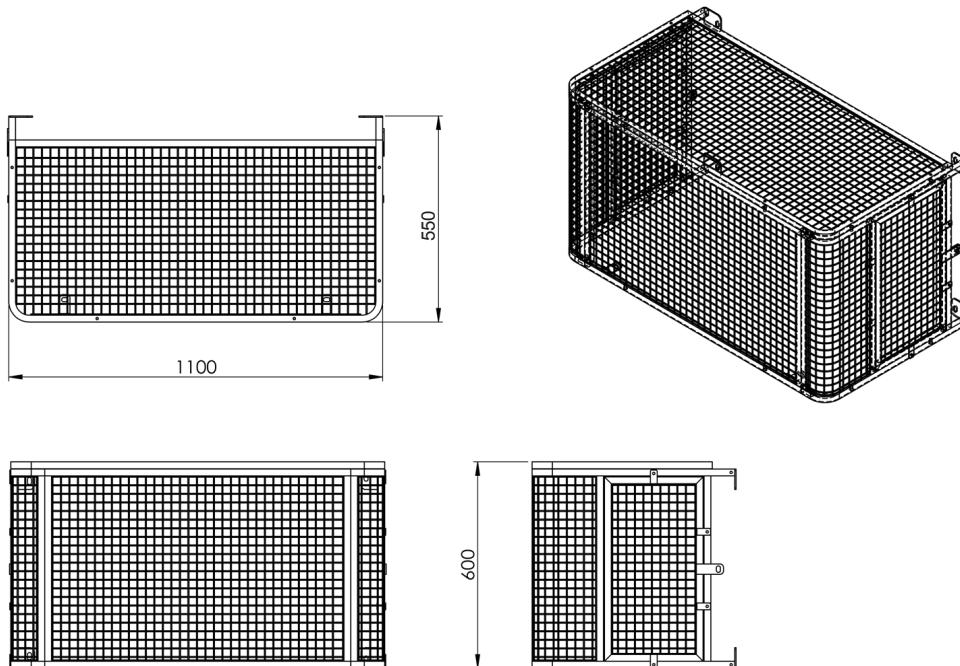

© 2023 Avantage Australia reserves the right to alter products and specifications without notice and does not accept responsibility for possible errors and omissions in published documentation. Date: 16/04/2023 Document: Avantage Airshield Cages ACA0600 Spec Sheet Version Number: V1

A: 74 Scanlon Drive, Epping VIC 3074
 T: 03 9989 5850 W: avantageaustralia.com.au
 E: sales@avantageaustralia.com.au

