


# ACA1400

## Specifications



Frame	20 mm x 20 mm x 1.6 mm tube, Butt Welded
Mesh	25 mm x 25 mm x 3 mm Welded Mesh - Welded to Frame
Cage Depth	600 mm deep OD - 580 mm deep ID
Cage Width	1145 mm wide OD - 1105 mm wide ID
Cage Height	1390 mm high OD, 1370 mm ID
Fixing Plate	80 x 35mm plate with slotted holes to suit 8mmØ fixings to wall and ground
Mounting Brackets	80 x 35mm Mounting Brackets supplied to provide 55mm clearance for pipework Cage can be installed with or without mounting brackets
Cage Safety	Front Corners are 90 mm radius to minimise personal injury
Assembly Required	Units are made up of the following parts (see diagram) #1 - Front Panel (Removable) #2 - Side Panel #3 - Side Panel with Access #4 - Access Panel (Removable) with Padlock Tab #5 - End Panel (Removable) #6 - Mounting Brackets
Lockable	Access Door has a Welded Tab if Padlock is required
Assembly Fixings	All Fixings supplied - M6 tamper proof Torx bolts, washers and tool
Optional End Panel	Available for Wall Mounted Installations - Part No EPA0001
Optional Joiner Bracket	Available to join and extend multiple cages - Part No JBA0001
Coating	Two stage protection with Zinc Plating and Black Powder Coating

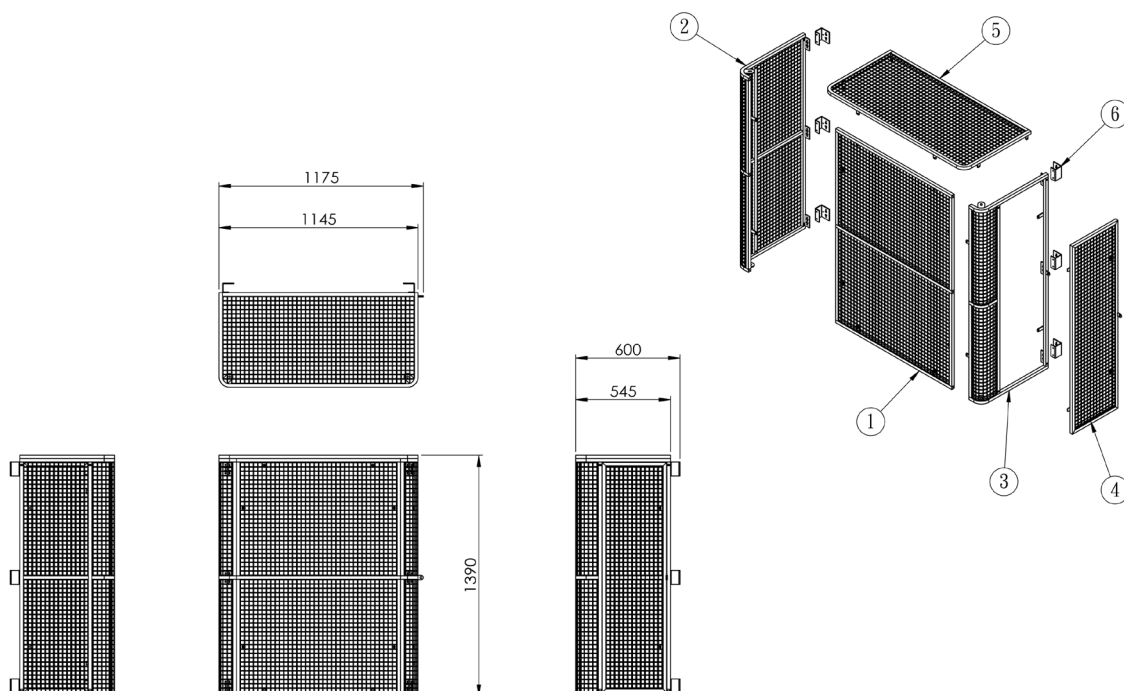

© 2023 Avantage Australia reserves the right to alter products and specifications without notice and does not accept responsibility for possible errors and omissions in published documentation.  
Date: 16/04/2023 Document: Avantage Airshield Cages ACA1400 Spec Sheet Version Number: V1

A: 74 Scanlon Drive, Epping VIC 3074  
T: 03 9989 5850 W: [avantageaustralia.com.au](http://avantageaustralia.com.au)  
E: [sales@avantageaustralia.com.au](mailto:sales@avantageaustralia.com.au)