Assembly Instructions

- ACC0800
- ACC1200

Fixings Supplied:


M6 x12 (14)

Use with flatwasher


M6 x30 (4)

We with springwasher and flatwasher

- Use M6 wrench to align all bolts.
- · Be careful not to cross thread.
- Tighten all bolts when fully assembled.
- End and front panel can be removed for access to tighten wall/ground fixings.

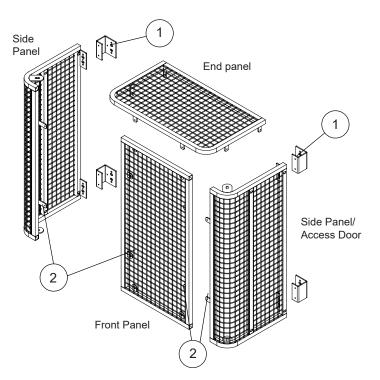

- Join mounting brackets to side panel with M6 x12.
 (Note: Cage can be mounted without brackets).
- 2. Assemble 2 side panels and front panel, using M6 x12.



- 3. Fit end panel and secure with M6 x12 (2) and M6 x30 (4).
- **4.** Fix cage to wall and ground as required.

