
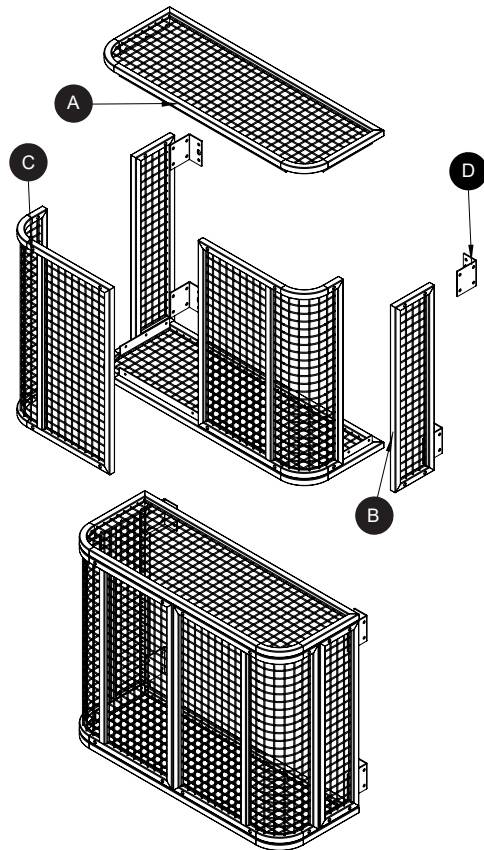


ACS0600G

Specifications

Frame	20 mm x 20 mm x 1.6 mm Welded Steel Tube
Mesh	25 mm x 25 mm x 3 mm Welded Mesh - Welded to Frame
Cage Depth	350 mm deep OD - 330 mm deep ID
Cage Width	795 mm wide OD - 755 mm wide ID
Cage Height	640 mm high OD, 600 mm ID
Mounting Brackets	80 mm x 50 mm Mounting Brackets. Optional holes allow the cage to be mounted flush to the wall or with 25 mm or 50 mm clearance for pipes and conduits
Cage Safety	2 Front Corners are 90 mm radius for fall safety
Assembly Required	Units are made up of the following parts (see diagram) A - End Panels (2) B - Side Panels (2) C - Corner Panels (2) D - Brackets (4)
Service Access	All panels (except sidepanels) are easily removable for full service access
Assembly Fixings	All Fixings - M6 tamperproof Torx bolts, washers and tool
Coating	Two stage protection with Hot Dip Galvanised and Black Powder Coating

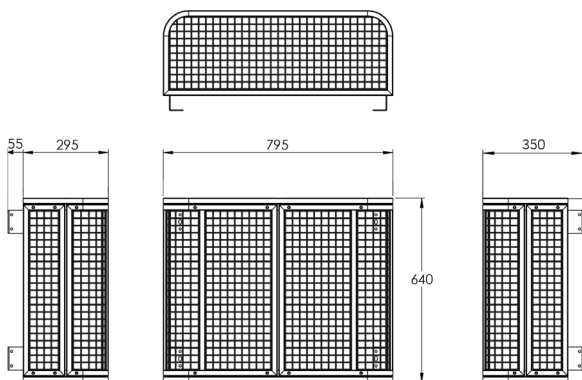

© 2025 Advantage Australia reserves the right to alter products and specifications without notice and does not accept responsibility for possible errors and omissions in published documentation.
Date: 14/07/2025 Document: Advantage Airshield Cages ACS0600G Spec Sheet Version Number: V2